

## Fitting the Hubbard Skirt Rear Jockey

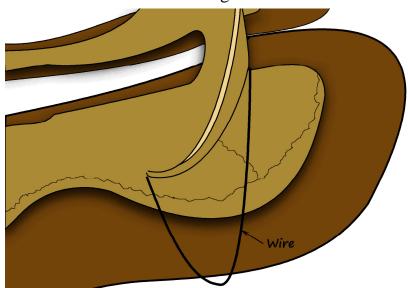

By using a bent piece of wire you can locate the position of the beginning and end of the curve at the back of the cantle.


Transfer these points onto the skirt top (jockey). Scribe an initial curve between these points onto the jockey and trim on this new line.

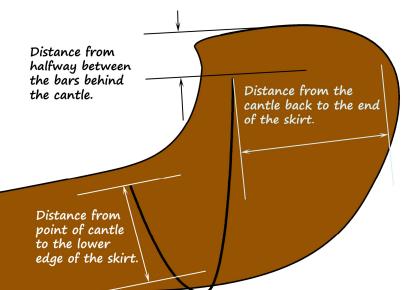

Place the piece onto the tree and spike it in place in front of the cantle point. Check the fit of the back cut.

Sage Creek Stock Saddle Co.

## Fitting the Hubbard Skirt Rear Jockey

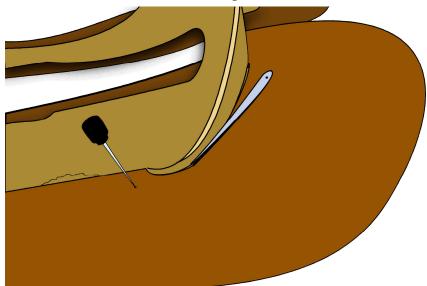

Set dividers to the width of the widest gap between the cantle back and the jockey.

Scribe a line onto the jockey at the set distance all along the cantle back.



Sage Creek Stock Saddle Co.

After trimming the jockey along this line check the fit again. The process may need to be repeated so that the fit is perfect.